


LH33 RUNNING GROUND

- Contact wheels are cast aluminum with bronze bushings & stainless steel axles
- Secure method of attaching running grounds to the tensioner and/or puller
- Mechanical connection to the tensioner ensures positive contact with the conductor at all times and prevents shuttering
- A stainless steel-wheeled version is available to be used at the puller to provide additional abrasion resistance against the steel pulling line (LH33-2).

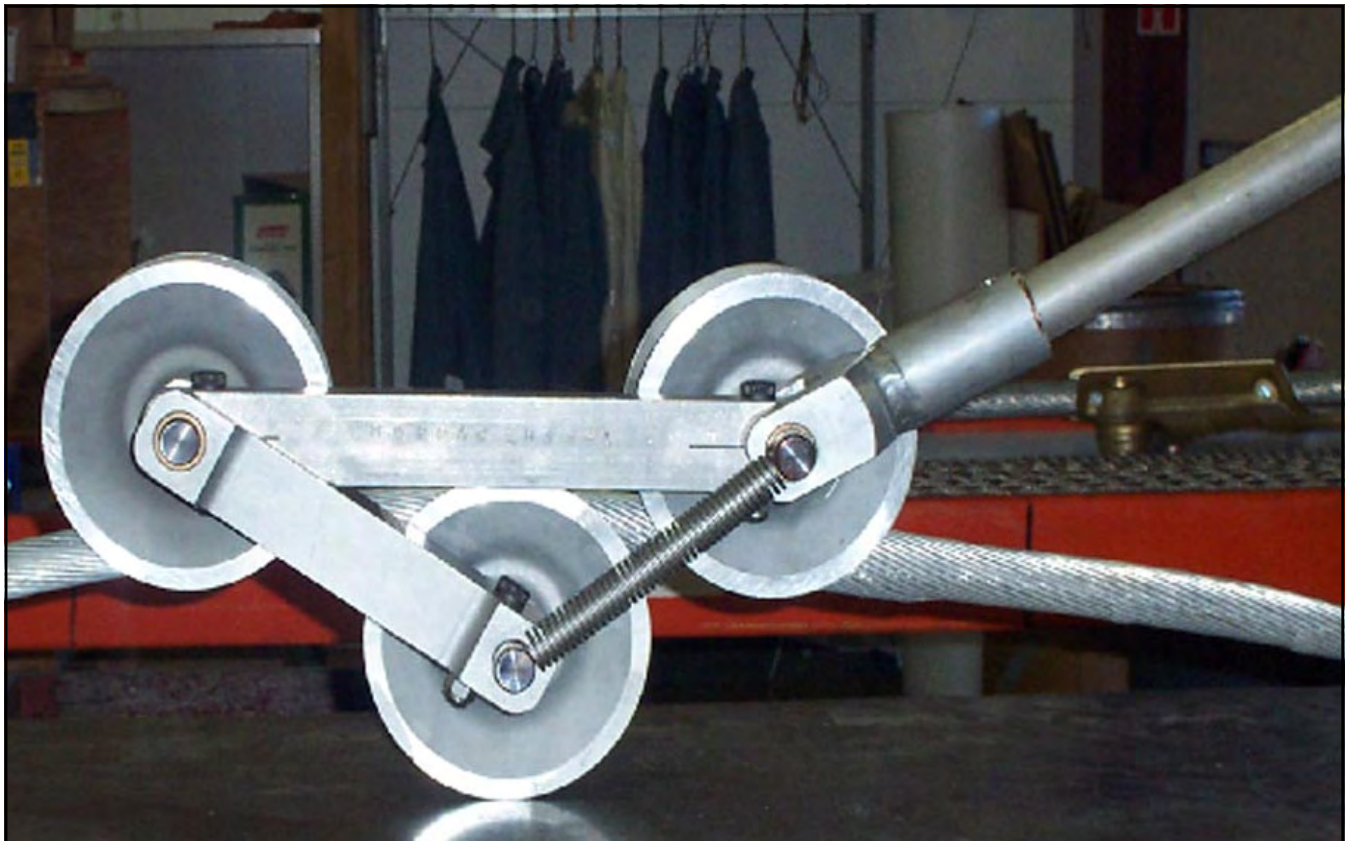

MORPAC INDUSTRIES, INC.

117 Frontage Road North, Suite A
Pacific, WA 98047-1052

Website: <http://www.morpac.com/>
Email: actuators@morpac.com

Phone: (253) 735-8922
Fax: (253) 735-8933